

How To Guide

2016 CS Adventurous



HOW TO: Shore Power

Connecting To Shore Power

Your Roadrek has a shore power cord; depending on the model it may be removable or permanently attached. Refer to the Electrical Section in this manual for details.

The power cord is designed to fit into a standard 30A RV outlet.

Campsite Power Connections

Most RV parks and campgrounds have AC power of various voltages and amperages available at each site. The power will typically be in a pedestal with a cover that flips up. If you cannot find your power pedestal or you're not sure how to open it, ask the campground personnel.




50A outlet



30A outlet



15A outlet

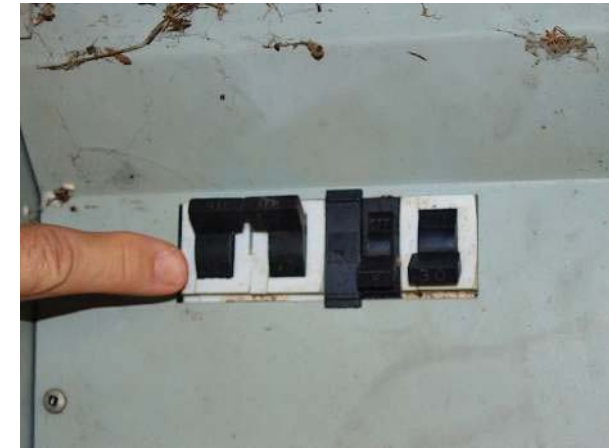

Breakers

A typical campsite's power pedestal will have three types of plug-in receptacles: 15 amp, 30 amp and 50 amp. The 15A receptacle is typically the same as you would find in your home. The 30A and 50A receptacles are specific to the RV industry. Other receptacles look similar but may not be wired the same. If in doubt, check with campground personnel.

The pedestal will also typically have individual breakers for the 15A, 30A, and 50A services. Many campgrounds turn off unused breakers so check that the breaker for the plug you will be using is turned on.

Your Roadtrek is equipped with a 30 Amp cord. Most power pedestals have a 30 amp receptacle.



15A to 30A adapter



50A to 30A adapter

It is possible that a campground (or perhaps a friend's driveway) will not have a 30A receptacle available for your use. You can purchase a 15A to 30A adapter and connect to an ordinary 15A household outlet.

Be aware that in those situations, you will have limited power compared to a 30A circuit. You will be able to run a single large appliance at a time; you may need to turn off your air conditioner if you want to use the microwave, for example.

If you exceed the current capacity of the receptacle you may pop the breakers in the pedestal. If this happens, turn off some appliances and reset the breaker.

It is also possible that you will find a 50A receptacle. Again, you can purchase a 50A to 30A adapter. In this case your power should not be limited as you will have the full 30 amps available. Although you are connected to a 50A service, you can only draw 30A; there is no advantage to connecting to a 50A service if a 30A service is available.